YAMAHA

HTR-6150BL

7.1-Channel Digital Home Theater Receiver

NEW PRODUCT BULLETIN

All the latest features and technologies receiver fans want, such as 1080p-compatible HDMI, XM and SIRIUS Satellite Radio ready, and iPod and Bluetooth audio compatibility plus great Yamaha features like CINEMA DSP, YPAO sound optimization and four SCENE buttons.

1 Advanced Features

- 4 SCENE buttons offering greater operating ease (with 17 preset SCENE templates)
- XM ready with XM HD Surround powered by Neural Surround
- SIRIUS Satellite Radio ready
- YPAO for automatic speaker setup
- iPod compatibility via Yamaha Universal Dock
- Bluetooth (A2DP) compatibility with Yamaha Bluetooth® Wireless Audio Receiver (YBA-10)
- Front panel mini jack for connecting portable audio player
- Multi zone functions including Zone 2 audio out, IR terminal and Trigger Out
- On-screen display with iPod song title display

2 High Sound Quality

- 7-channel 630W powerful surround sound (90W x 7)
- Direct mode for high quality sound reproduction
- Burr-Brown 192kHz/24-bit DACs used in all channels
- Assignable amplifiers to bi-amp connection

3 High Picture Quality

- 1080p-compatible HDMI (2 in/1 out) including 1080p/24Hz repeat
- Component video upconversion with TBC
- HDTV compatible component video terminals (3 in/1 out)

4 Surround Realism

- CINEMA DSP with 8 DSP programs
- Compressed Music Enhancer to improve compressed music sources
- Night Listening Enhancer (Cinema/Music) and SILENT CINEMA

8 CINEMA DSP Programs	
Compatible Decoder Straight	
	Dolby Digital
	DTS Digital Surround
	Dolby Digital EX
	DTS-ES Matrix 6.1
	DTS-ES Discrete 6.1
	DTS 96/24
	Dolby Pro Logic
	Dolby Pro Logic II Music
	Dolby Pro Logic II Movie
	Dolby Pro Logic II Game
	Dolby Pro Logic IIx Music
	Dolby Pro Logic IIx Movie
	Dolby Pro Logic IIx Game
	DTS Neo:6 Music
	DTS Neo:6 Cinema
	Neural Surround
CINEMA DSP Programs	
MUSIC	Pop/Rock
	Hall
	Jazz
ENTERTAINMENT	Game
	TV Sports
MOVIE	Movie Spacious
	Movie Dramatic
STEREO	7ch Stereo
CINEMA DSP Program Total	**8**

HTR-6150BL 7.1-Channel Digital Home Theater Receiver

Advanced Features

SCENE — Greater Operating Ease

Four SCENE buttons make operating the receiver easier than ever. Pressing a SCENE button automatically turns the power on and launches a number of operations that initiate play of the source controlled by that button. Many SCENE settings are available, such as Dock Listening, DVD Viewing, Radio Listening and Game Playing. Browsing and selecting the settings is quickly accomplished by rotating the Input knob and watching the on-screen display. When a Yamaha DVD or CD player with SCENE compatibility is connected to the Remote Out jack, it can be operated via the receiver's SCENE functions.

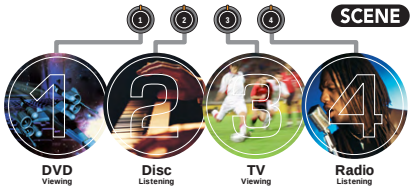

XM Satellite Radio Ready with XM HD Surround Powered by Neural Surround

This receiver is XM Satellite Radio Ready, allowing you to hear over 170 digital channels of music, news, sports, talk and entertainment. To get XM Satellite Radio the XM Mini-Tuner and Home Dock including home antenna are required.

This receiver is also capable of receiving XM Satellite Radio with XM HD Surround powered by Neural Surround.

SIRIUS Satellite Radio Ready

The HTR-6150BL is also ready to receive SIRIUS satellite radio. SIRIUS brings your favorite entertainment straight into your home, including 100% commercial-free music, plus superior sports coverage, uncensored talk and comedy, exclusive entertainment, world-class news and more.

YPAO for Automatic Speaker Setup

The HTR-6150BL uses Yamaha's YPAO system that quickly and automatically analyzes the acoustics of the room and adjusts various speaker parameters to provide the optimum sound at the listening position. It's like having a professional audio engineer set up and tweak your system.

Zone 2 Audio Enjoyment

The HTR-6150BL provides Zone 2 audio output. This means you can set the receiver to reproduce separate sources in the main zone and second zone (Zone 2) by using a second amplifier/speaker system. IR terminals and Trigger Out add to operating convenience.

Initial Volume and Maximum Volume

Two volume setting functions are included on this receiver for additional convenience. Initial Volume Setting allows you to set the volume level that will be heard each time the power is turned on. Maximum Volume Setting prevents unexpected loud sounds, for example if a young child turns the volume knob.

High Sound Quality

Direct Mode

You can enjoy pure HiFi sound from 2-channel PCM and analog sources by the Direct mode which allows signals to bypass the decoders and DSP processors.

Bi-Amping Assignability

Bi-amping is an advanced feature that lets you enjoy superior sound quality. It assigns the surround back channels to provide separate low frequency and mid/high frequency allocation to the front channels, thus improving sound clarity in all frequency ranges.

Audio-Grade Parts and Devices

The HTR-6150BL offers the latest and best technologies, parts and circuit designs to maximize sound quality. These include custom-made block capacitors (1), high grade Burr-Brown DACs and ADC (2) and other high quality audio-grade parts.



High Picture Quality

1080p-Compatible HDMI (2 In/1 Out)

This receiver features dual HDMI inputs and one output that support 1080p resolution so you can connect two HDMI sources, such as a DVD player and a high definition set-top box, and enjoy the highest possible quality with a 1080p display. With 1080p/24Hz signal repeating, you can enjoy the full potential of Blu-ray discs.

Component Video Upconversion with TBC

The HTR-6150BL is equipped with high-definition video up-conversion circuitry incorporating high-performance video encoder/decoders from Analog Devices. A Time Base Corrector (TBC) transforms degraded analog video signals into a stable format for distortion-free viewing.

Inputs	HDMI (Fixed & Assignable)	2
	XM / SIRIUS Satellite Radio Terminal	1 / 1
	Dock Terminal (for iPod / Bluetooth)	1
	Optical Digital (Fixed and Assignable)	2
	Coaxial Digital (Fixed and Assignable)	1
	S-Video	3
	Analog A/V / Audio*	4 / 2
	Component Video	3
	Multi-Channel External Input	8 ch

Outputs	HDMI	1
	Analog A/V / Audio	1 / 1
	S-Video	1
	Component Video Monitor	1
	S-Video / Composite Monitor	1 / 1
	Speaker (without subwoofer)	7 ch / 9 ter.
	Subwoofer	1
Others	Zone 2 Audio Out	1
	Remote In/Out	1 / 1
	Trigger Out	1

* Including front panel Video Aux with mini jack terminals.

Surround Realism

CINEMA DSP with 8 DSP Programs

You have a choice of eight unique Yamaha CINEMA DSP surround programs to bring out the full audio potential of your entertainment sources.

Compressed Music Enhancer

When music is encoded in a digital compressed format such as MP3, frequency response suffers in the high and low ranges. Yamaha employs sophisticated digital signal processing with exclusive algorithms, enabling faithful reproduction of the original music, for excellent sound quality.

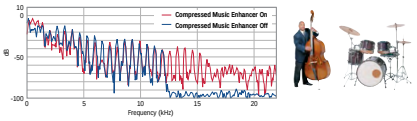

The Compressed Music Enhancer restores the original, live sound of your music, especially deep, strong sounds like bass and drums.

Other Notable Features

- 40-station preset tuning / Auto preset tuning
- HD Audio LPCM 7.1-channel reception (up to 96kHz)
- High dynamic power, low-impedance drive capability
- iPod song titles displayed in English and Western European languages ISO 8859-1 (Latin 1) on the front panel and on-screen display
- Night Listening Enhancer, SILENT CINEMA and Virtual CINEMA DSP
- Audio Delay for adjusting lip-sync (0–160ms)
- Front panel Video Aux input terminals with mini jack
- 9 selectable subwoofer crossover frequencies
- Subwoofer phase select
- HDTV compatible component vide terminals (3 in/1 out)
- Subwoofer out
- 8-channel or 6-channel external input
- Speaker A or B selection
- Preset remote unit

Yamaha Bluetooth® Wireless Audio Receiver
The YBA-10 Bluetooth Audio Receiver docks to the receiver and supports A2DP audio streaming, so users can enjoy music wirelessly from Bluetooth-enabled mobile phones, Windows PCs and Macs.

Bluetooth®

Yamaha Universal Dock for iPod
The optional Yamaha Universal Dock lets you connect your iPod to the receiver.

Made for iPod

iPod not included

Main Specifications

Minimum RMS Output Power (8 ohms, 1 kHz, 0.9% THD)	
Front L/R Channels	90 W/ch
Center Channel	90 W
Surround L/R Channels	90 W/ch
Surround Back Channels	90 W/ch
Dynamic Power (1 kHz) 8/6/4/2 ohms	110/130/160/180 W
Frequency Response	10 Hz–100 kHz +0, -3 dB
Total Harmonic Distortion (CD, Front Sp Out) (1 kHz, 50 W/8 ohms)	0.06%
Signal-to-Noise Ratio (CD)	100 dB (250 mV)
Monitor Out Frequency Response Component Video Signal	5 Hz–60 MHz -3 dB
Dimensions (W x H x D)	$17^{1}/_{8}$" x $5^{15}/_{16}$" x $13^{7}/_{8}$" 435 x 151 x 352 mm
Weight	19.8 lbs.; 9 kg

• The XM Satellite Radio service is only available in the 48 contiguous United States (not available in Alaska and Hawaii) and Canada. • XM name, XM Ready and related logos are registered trademarks of XM Satellite Radio, Inc. • Neural Surround™ name and related logos are trademarks owned by Neural Audio Corporation. • "SIRIUS" and the SIRIUS dog logo are registered trademarks of SIRIUS Satellite Radio Inc.• iPod is a trademark of Apple, Inc., registered in the U.S. and other countries. • Dolby and the double-D symbol are registered trademarks of Dolby Laboratories. • "DTS" and "DTS ES | Neo:6" are registered trademarks of DTS, Inc. "96/24" is a trademark of DTS, Inc. • HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. • Burr-Brown products are trademarks of Texas Instruments, Inc. • The *Bluetooth®* word mark and logos are registered trademarks ownerd by Bluetooth SIG. Inc. • CINEMA DSP is a trademark of Yamaha Corporation. • SILENT CINEMA is a trademark of Yamaha Corporation.• Product designs and specifications are subject to change without notice.